



Lubricant dispenser – High working safety and low maintenance for screw jack lubrication.

Poor lubrication of screw jacks can reduce their lifetime considerably and result in costly repair of machinery. The use of lubricant dispensers allows you to significantly reduce operating and maintenance costs. The lifetime of the screw jacks is longer, fewer service interventions are necessary and the downtimes of the machines can be kept to a minimum. Nozag has been using lubricant dispensers for greasing screw jacks NSE for many years. Our experience proves that they are efficient and reliable.

Vast range of applications


The lubricant dispenser is ideal for complex applications such as in lubrication points that are difficult to reach, in a danger area or at assembly points that can easily be overlooked. In these situations the lubricant dispenser feeds the Nozag screw jack reliably. Depending on the required amount of lubrication, the dispensers last for 1 up to 12 months. They ensure continuous lubrication with the optimal lubricant amount for 24 hours. Damages caused by over or under-lubrication can be avoided and high maintenance and repair costs are things of the past.

Lubrication becomes simple and transparent.

The automatic lubricant dispenser is screwed in directly at the lubrication point. Working independently, it is activated when the running time is set. The lubricant level can always be monitored through the inspection window and the quantity lasts longer than the set running time. The amount of lubricant can be adjusted individually later on. The perfect situations for the application of the lubricant dispenser are temperatures between -20 and +55°C. The time-consuming manual greasing is no longer necessary.

Easy upgrading

Due to its simple construction, the lubricant dispenser can easily be mounted on existing objects. It allows you to remove used grease nipples and replace them by lubricant dispensers equipped with a connection unit. You will see the immediate benefit of this simple automatic lubrication.

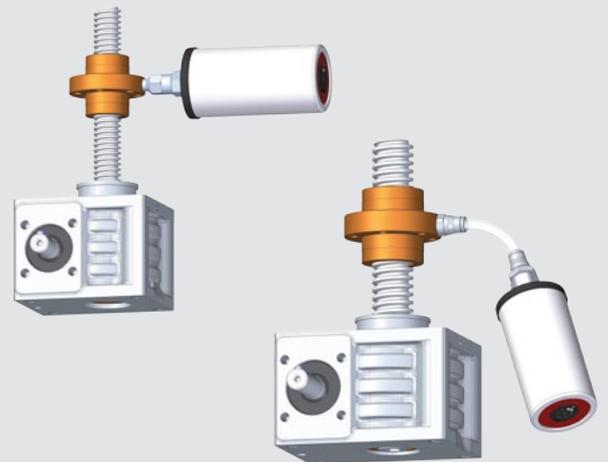

Automatic single-point lubricant dispenser in sizes 60 and 125 ml

Technical details

Volumes: 60 and 125 ml
Lubricant: Universal grease with MoS2 and food-grade lubricant

Lubricator SSG

	SSG	SSG with flexible tube
NSE2	SSG-RED-M6/-G1/8	SSG-RED-M6 + SSG-S
NSE5	SSG-RED-M6/-G1/8	SSG-RED-M6 + SSG-S
NSE10-SN/SL*	SSG-RED-G1/8	SSG-S
NSE10-RN/RL*	SSG-RED-M6/-G1/8	SSG-RED-M6 + SSG-S
NSE25	SSG-RED-G1/8	SSG-S
NSE50	SSG-RED-G1/8	SSG-S
NSE100	SSG-RED-G1/8	SSG-S

* SN/SL = standing spindle, RN/RL = rotating spindle